



CAR FILLING



FUEL MANAGEMENT SYSTEMS



KITS



PUMPS



METERS



METERED NOZZLES

DELPHIN PRO IBC

FEATURES

- FULLY AUTOMATIC
- 100% COMPATIBLE WITH ALL CARS AND VEHICLES**
- STURDY DESIGN
- EASY TO INSTALL
- FLOW RATE REGULATOR
- SPECIFICALLY DESIGN FOR IBC TANKS

DELPHIN PRO IBC is a compact and professional solution for an AdBlue® car filling fixed installation. It benefits from all the features of Delphin Pro AC while being suitable for all situations with a higher consumption of AdBlue®. It is designed to be hung on IBC tanks guaranteeing maximum security and reliability thanks to the lock bracket system. The integrated handle allows a safe and easy lifting. The flat bottom allows to place DELPHIN PRO IBC firmly on the floor during the IBC tank replacement or any other operation.

PERFORMANCE

2-11 L/MIN

FLOW RATE

AC
VOLTAGE
POWER

6M

HOSE LENGTH

AVAILABLE WITH
ON/OFF
BUTTON
SWITCH



DELPHIN PRO IBC



IMBALLAGGIO

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FO0100BOA	24	52,9	500X340X590	19,7X13,4X23,2	1
FO0100B2A	24	52,9	500X340X590	19,7X13,4X23,2	1



NOZZLES



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER




WINDSCREEN

FUNCTIONING

1
ACTIVATE
DELPHIN PRO2
USE THE DIMMER
TO ADJUST
THE FLOW RATE3
CONNECT THE
CONNECTOR
TO THE TANK
OF THE CAR4
PRESS THE
REFILL BUTTON
FOR 5 SECS5
ONCE THE TANK IS
FULL, DELPHIN PRO
AUTOMATICALLY
STOPS DISPENSING

DIMENSIONS

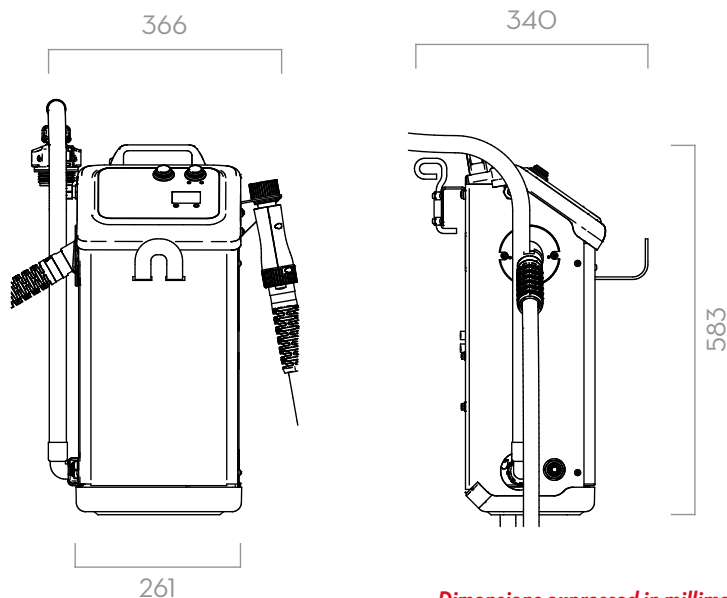

Dimensions expressed in millimeters

IN THE BOX

- DELPHIN PRO IBC UNIT
- AF2 / SEC CONNECTOR
- INSTRUCTION MANUAL

DETAILS



UNIVERSAL ISO CONNECTOR



AF2 CONNECTOR INCLUDED



SEC VERSION INCLUDED



DIGITAL FLOW METER

MATERIALS

- PUMP:
- BODY: POLIPROPYLENE
- DIAPHRAGM: POLIPROPYLENE

DATI TECNICI

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			HOSE		ON/OFF
			L/MIN	GPM	AC V/HZ	POWER WATT	AMP. MAX.	LENGHT (M)	Ø (MM)	SWITCH
FO0100BOA	DELPHIN PRO IBC AF2-SEC 230V/50HZ		2 - 11	0,5 - 2,9	230/50	400	1,95	3	19	SI
FO0100B2A	DELPHIN PRO IBC AF2-SEC 230V/50HZ 6 MT		2 - 11	0,5 - 2,9	230/50	400	1,95	6	19	SI

**IN ACCORDANCE TO ISO/FDIS 22241-4:2009

DELPHIN PRO IBC