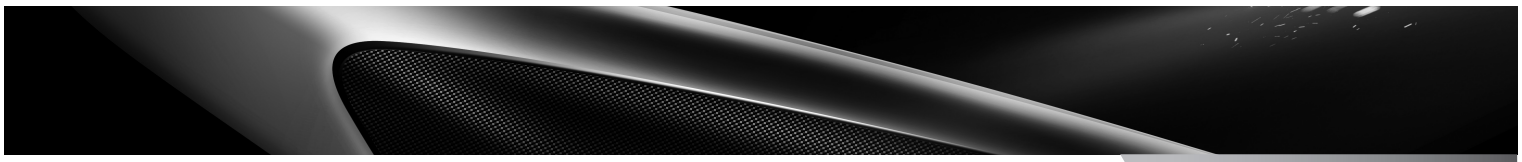

07/08/2019 / 29169

PROPULSE TT 4T 0W40SNOWSCOOTER ESTER

This ester-based synthetic blend snowscooter oil can be used within engines, transmissions and wet clutches. Its groundbreaking additive technology increases both engine performance and protects all lubricated parts completely. This powerful formulation covers a large part of the snowscooter market thanks to its high-end properties. It combines excellent fluidity at low temperatures with outstanding protection at high operational temperatures.

APPLICATIONS

This four-stroke snowscooter engine oil exceeds the standards of API SN, SM, SL, SJ, SH and SG. Furthermore, this lubricant meets the JASO MA2 specification, which is additional proof of its high-quality and broad applicability.

FEATURES

Improved engine, transmission & wet clutch performance.
Recommended product for touring & daily riding.
Easier fluid management thanks to the oil's broad applicability.

SPECIFICATION LEVEL

API SN **JASO** MA2

TYPICAL CHARACTERISTICS

Test	Method	Unit	Average results
Density at 15°C	ASTM D4052	g/ml	0.855
Kinematic viscosity at 40°C	ASTM D445	mm²/s	81.9
Kinematic viscosity at 100°C	ASTM D445	mm²/s	14.5
Viscosity index	ASTM D2270		185
B.N. (HCLO4 method)	ASTM D2896	mg KOH/g	7.3
Pour point	ASTM D6892	°C	-45
Colour	VISUAL		RED

We reserve the right to alter the general characteristics of our products in order to let our customers benefit of the latest technical evolutions.

CHAMPION CHEMICALS NV
G. Gilliotstraat 52 – 2620 Hemiksem – Belgium
Tel. +32 3 870 00 00
www.championlubes.com

CHAMPION®

The CHAMPION brand and design are registered trademarks of Champion Chemicals NV - Made in Belgium